


GROVE FIELD AIR TRAFFIC PATTERN

Pattern Altitude 1,200' MSL	Runway Elevation 420'	CTAF 122.9	Helicopters Avoid the flow of fixed wing traffic
--------------------------------	-----------------------------	---------------	--------------------------------------------------------

- 1** Enter pattern in level flight, at traffic pattern altitude and abeam the midpoint of the runway.
- 2** Maintain traffic pattern altitude and stay on downwind leg until abeam the approach end of the runway.
- 3** Complete turn to final at least 1/4 mile from runway.
- 4** If remaining in the pattern, start turn to crosswind leg at least 1,000' from end of runway and at least 400' AGL.
- 5** If departing the pattern, continue straight out, or exit with a 45 degree turn to the left after reaching pattern altitude.

THESE PROCEDURES ARE INTENDED TO REDUCE NOISE IMPACTS.

PILOTS ARE RESPONSIBLE FOR THE SAFE OPERATION OF THEIR AIRCRAFT AND ARE EXPECTED TO DEVIATE FROM THESE PROCEDURES AS NECESSARY TO ASSURE SAFE FLIGHT.

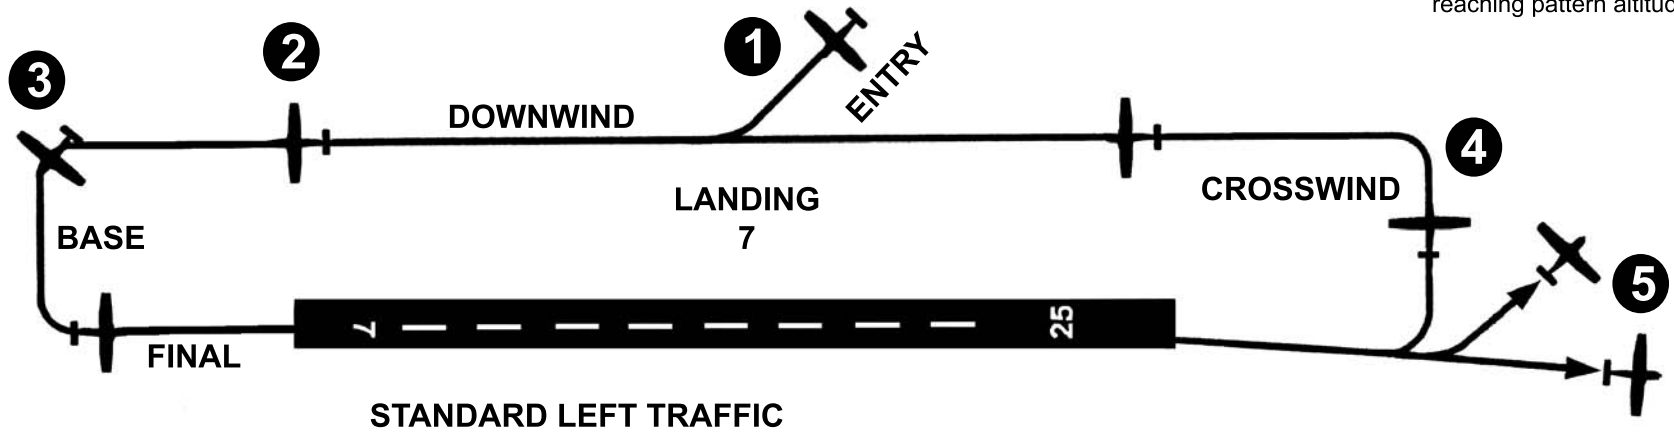

SPECIAL NOTE
Takeoffs to the east use 10 degree right turn to avoid homes.

